

# QCW FAC STACKS





## Features :

- AuSn packed
- Spectral width & Light spot controllable
- High power density, high peak power
- High reliability and long service life
- High electro-optical conversion

## Applications :

- Pump source
- Illumination
- Detection
- Research

LM-8XX-Q3000-F-G15-P0.73-1

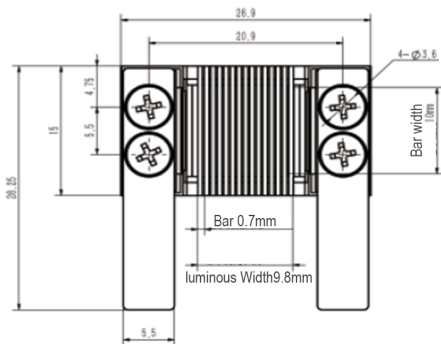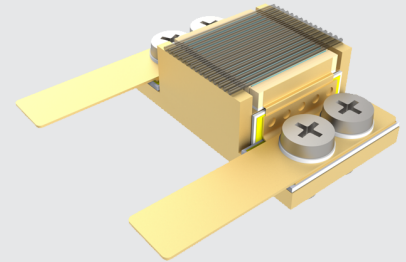

PARAMETERS	Minimum	Typical	Maximum
Peak Power	200W	3000W	4500W
Center Wavelength	790nm	808nm	815nm
Center Wavelength Tolerance	/	±2nm	/
Fast Axis Divergence(FWHM)	/	4 Deg.	/
Slow Axis Divergence(FWHM)	/	8 Deg	/
Wavelength Shift	/	0.26mm/°C	0.28mm/°C
Pulse Width	/	200µs	300µs
Duty Cycle	/	0.4%	1%
Operating Current	/	200A	300A
Power Conversion Efficiency	50%	55%	/
Operating Voltage	/	1.8V	2V

## Other

Operating Temperature	- 45°C	25°C	70°C
Storage Temperature	- 60°C	25°C	85°C
Number of Bar	1	15	/
Spacing Between Bars	/	0.73mm	/

## NOTE

1. Specification at around temperature 25 °C, at the initial lifetime
2. Output power & crystal dimension can be customized as needed
3. Follow the LumiSpot Tech operating instruction manual.
4. Any other questions, please contact us.
5. Storage and operation in a non-condensing environment is required at temperatures below ambient.

