


LMF-525D-C30-F200-B32 Specification List

Product Description

The product is a fiber-coupled output semiconductor diode laser, which is used as a pump source. It has the advantages of compact structure, small size, light weight, high power density, high electro-optical efficiency stable performance and long life. Applied in fluorescence excitation, spectral analysis, photoelectric detection, and laser display etc., which is an important component of laser systems.

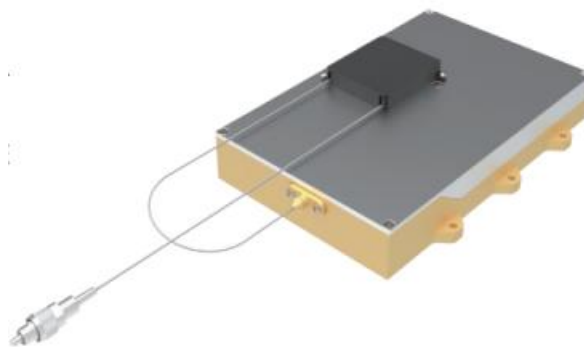

Main Application

- Illumination
- Detection
- Scientific research

Main Features

- High environmental adaptability
- High-efficiency conductive cooling
- Long lifespan
- Compact structure and lightweight

Technical Parameter @25°C

Optical Parameters	Units	Minimum	Typical	Maximum
Output Power	W	30		
Central Wavelength	nm		525 $\pm$ 5/532 $\pm$ 5	
Spectrum width (FWHM)	nm		10	
95% energy NA	NA		0.22	
homogenization			85% (with lens)	
Electric Parameters	Units	Minimum	Typical	Maximum
Electro-optical efficiency	%	12		
Working Current	A			2
Working Voltage	V		66V-82V	


(2 channels, each 33V-41V, can be connected in series)

Fiber Parameters	Units	Minimum	Typical	Maximum
Fiber core diameter	μm		200	
Fiber Cladding Diameter	μm		220	
Fiber NA			0.22	
Fiber Length	m		1±0.1	Customized
Fiber Sheath Diameter	mm		0.9	Customized
Fiber Connector			FC/SMA905 optional	


Other Parameters	Typical
High and low temperature storage	First store at +70 °C for 1 hour, then store at -50 °C for 1 hour, cycle three times, with a heating and cooling rate of 3 °C/min

Structure Parameters	Units	Minimum	Typical	Maximum
Dimension	mm		160×78×23	
Weight	g		1150	
Platform			B32	

Spectral Chart

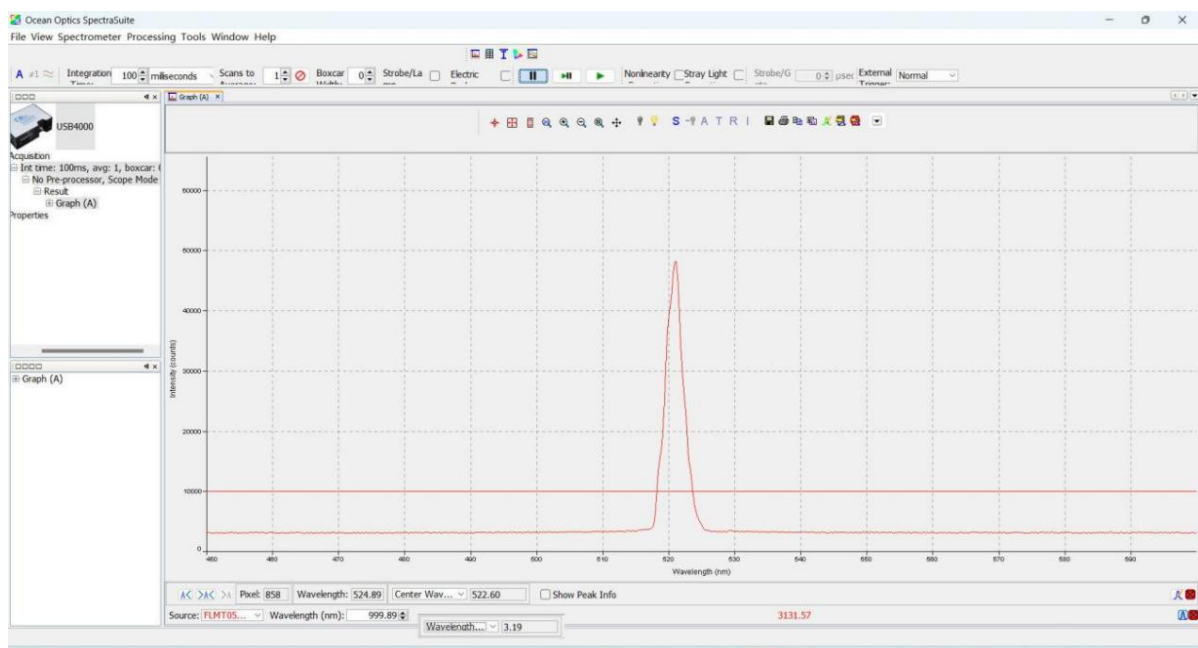

Layout Drawing

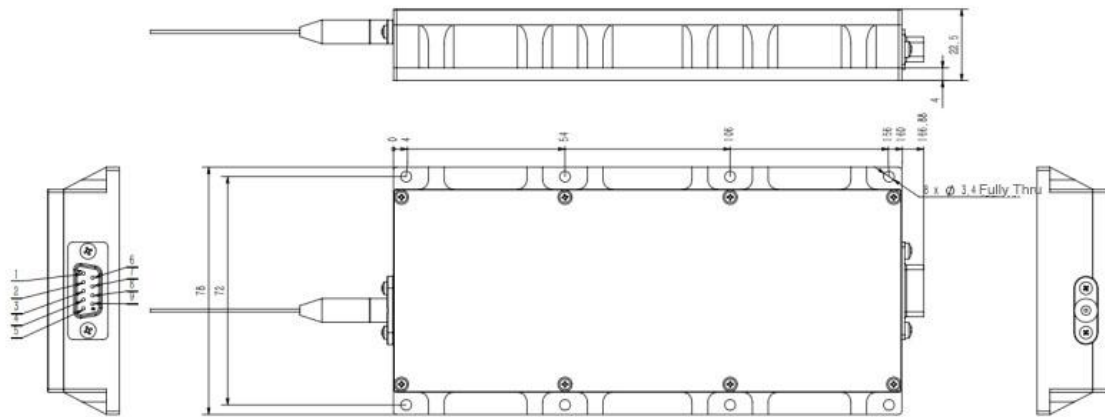

Pin	No.:
LD1 -	1
LD1 +	2
LD2 -	3
LD2 +	4
LD3 -	6
LD3 +	7
LD4 -	8
LD4 +	9
	5 undefined no soldering wires

Attentions

- During transportation, storage, and use, anti-static measures must be taken, and short-circuit wires should be connected between the pins during transportation and storage.
- Before use, ensure the fiber optic end-face is clean.
- Use a constant current power supply and avoid peak currents and surges during operation.
- When the laser is in operation, avoid direct exposure of eyes or skin to the laser.
- The device should be used within its rated current and power.
- Ensure good heat dissipation when the laser is working; it is recommended to use high thermal conductivity silicone grease on the heat-conducting surface.
- For water cooling, a temperature range of 23-25 degrees Celsius is recommended.
- Do not bend the fiber optic cable at sharp angles; the bending radius should be greater than 300 times the diameter of the fiber.