


## LMF-878.6A-C65-F400-C6 Specification Manual

### Product Description

The product is a fiber coupled output diode laser, which is used as a pump source. It has the advantages of compact structure, small size, light weight, high power density, high electron-optical efficiency, stable performance and long life. Suitable for industrial processing, pumping, photoelectric detection, etc., is an important part of the system.

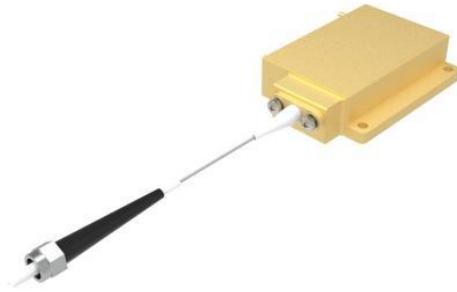

#### Main Feature

- High environmental adaptability
- High efficiency conduction heat dissipation
- Long life
- Compact structure and light weight

#### Main Application


- Solid state laser pump source
- Direct semiconductor
- Laser illumination
- Scientific research

### Technical Parameter @25°C Water Cooling

Optical Parameters	Units	Minimum	Typical	Maximum
Output Power 25°C	W	65	35	
Central Wavelength	nm	878.1	878.6	879.1
Spectra Width (FWHM)	nm			1
Wavelength locking range			30%-100% power	
95% power NA	NA		0.17	
Temperature drift coefficient	nm/°C		0.015	

Echo isolation	nm	1030-1200		
Electric Parameters	Units	Minimum	Typical	Maximum
Electron-optical efficiency	%	47	50	
Working Current	A		13	14
Working Voltage	V		10	12
Fiber Parameters	Units	Minimum	Typical	Maximum
Fiber core diameter	µm		400	
Fiber NA			0.22	
Fiber Cladding Diameter	µm		440	
Fiber Length	m	1.5		Customized
Fiber Optic Sheath Diameter	mm		3	Customized
Terminal		SMA 905		

## Layout Drawing

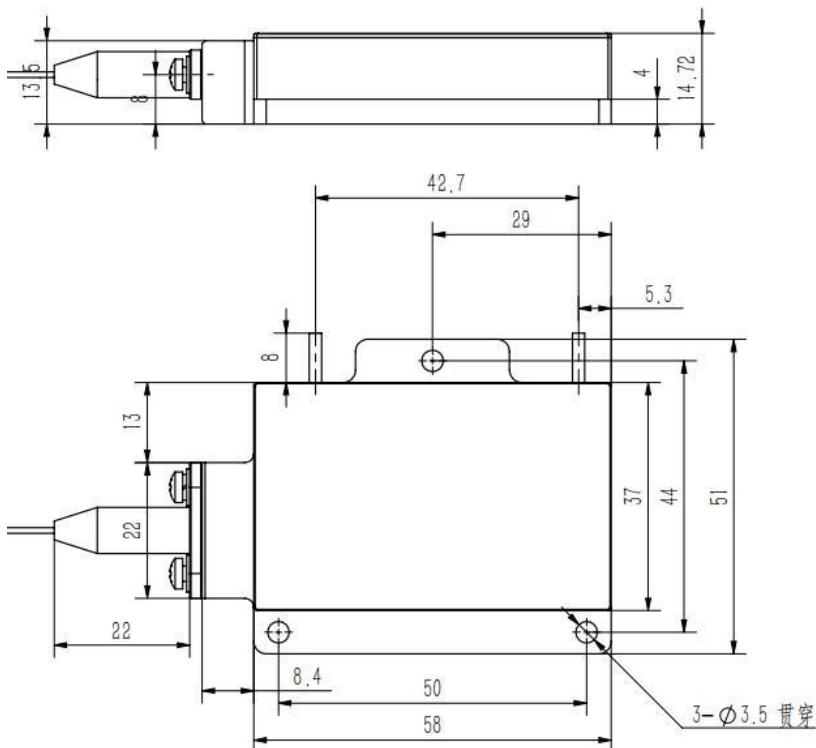

**Note:**

- During transportation, storage, and use, anti-static measures must be taken, and short-circuit wires should be connected between the pins during transportation and storage.
- Before use, ensure the fiber optic end-face is clean.
- Use a constant current power supply and avoid peak currents and surges during operation.
- When the laser is in operation, avoid direct exposure of eyes or skin to the laser.
- The device should be used within its rated current and power.
- Ensure good heat dissipation when the laser is working; it is recommended to use high thermal conductivity silicone grease on the heat-conducting surface.
- For water cooling, a temperature range of 23-25 degrees Celsius is recommended.
- Do not bend the fiber optic cable at sharp angles; the bending radius should be greater than 300 times the diameter of the fiber.